



ASSOCIAZIONE TERMOTECNICA ITALIANA
SEZIONE LOMBARDA



Safety devices for overpressure protection. Rupture discs: applications, sizing, and types

*Cristian Barbi and Mario Modena
DonadonSDD*

-
- Milano, 18 Aprile 2018
- Auditorio TECNIMONT

Summary



- Devices for overpressure protection
- Pressure Safety Valves and Rupture discs
- Rupture Disc properties and application parameters
- Evolution of rupture disc models and performance
- Evolution of manufacturing technology
- The laser scoring process

Pressure Safety Valves and Rupture Discs

- Pressure Safety Valves and Rupture Discs are Pressure Safety Devices designed to protect plants and equipment from overpressure conditions
- Pressure Safety Valves (PSV) are reclosing safety devices
- RD are non-reclosing safety devices
- When the overpressure condition that has caused the opening of the device ceases, PSV recloses, instead RD will not reclose
- Both devices protect from overpressure, however PSV is mechanical and RD is simple
- PSV must be installed in vertical position; RD may be installed in every position
- These devices may be used as alternative or complement .


Installation of PSV and RD

- When used together a PSV, the RD may be installed:
 - In parallel, useful for ensuring an additional protection level for the same or different plant failure case (typical application: protection of liquefied gas tanks)
 - Downstream, useful for protecting the valve from corrosive fluids that may be present in the discharge piping (typical application: petrochemical plants where all effluents are collected in a common piping leading to the flare)
 - Upstream

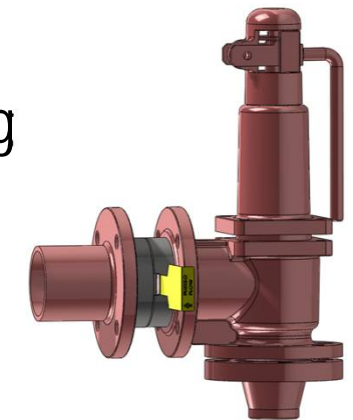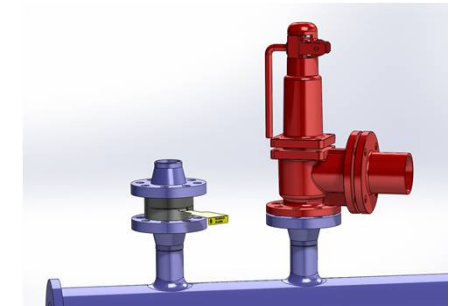

Main Advantages of RD upstream a PSV

- Protection of the valve from corrosive or fouling process fluids
- Reduction of valve maintenance costs (cleaning and calibration)
- Reduction of manufacturing cost of the valve that may be fabricated with less expensive materials

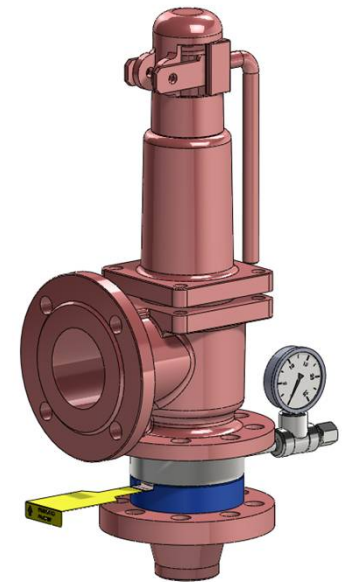

Total Ownership Cost

- These advantages more than offset the cost of installation of a rupture disc upstream a PSV
- Leaks and maintenance requirements of PSV, due to corrosion or fouling of the seat (very important for dangerous fluids), are avoided
- This means a reduction of Total Ownership Cost

Rupture Disc properties and applications

- RD are differential devices: they open when the pressure difference between upstream and downstream is above the set pressure
- RD are non-reclosing devices: once the disc has opened, it will not re-close (and all the fluid is discharged)
- Opening (or bursting) is a very rapid phenomenon and therefore the RD is able to protect equipment also from a very steep pressure increase.

RD application parameters

- Specified rupture pressure is the bursting pressure quoted (with a coincident temperature) when defining the bursting disc requirements


Application parameters 2

- Tolerance is the range of pressure between the specified minimum and maximum bursting pressure, it is expressed in percentage or absolute values

Application parameters 3

- Operating ratio is the maximum recommended ratio between operating pressure and minimum bursting pressure

Set Pressure, Tolerance and Operating Ratio

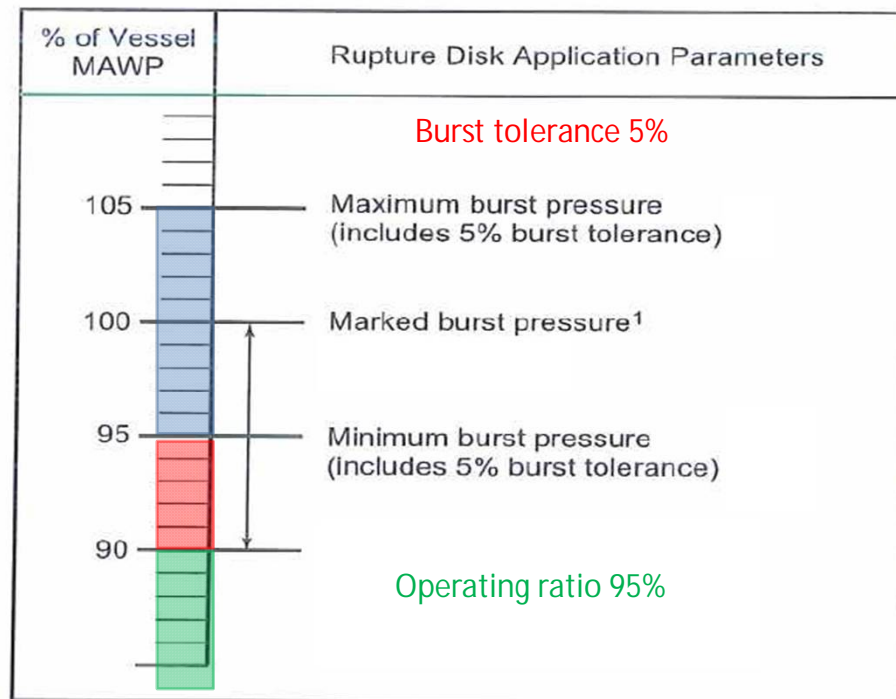

Maximum burst pressure = 105 bar g

Marked burst pressure = 100 bar g

Minimum burst pressure = 95 bar g

Maximum recommended operating pressure =
 $100 \times 0,95 \times 0,95 = 90,25 \text{ bar g}$

Application parameters 4

- Vent area: cross-section area available for discharge of fluid
- Key parameter for sizing the vent area:
 - mass flow rate
 - molecular weight
 - rupture pressure
 - discharge coefficient

Rupture disc materials

- First choice is metal.
 - The rupture disc is thin and therefore expensive materials are frequently used.
 - Common choices are cold rolled coils of: Stainless Steel (316) or high performing alloys like Inconel, Hastelloy, Monel, but also Nickel, Titanium, and Tantalum.
- Graphite is also used in many cases, especially when the disc is used in contact with highly corrosive fluids

A) Base model – solid disc

- These discs are flat or domed in the direction of the bursting pressure and are formed by a single layer of metal or graphite



Calibration

- Rupture pressure depends from 3 factors
 - Active diameter
 - Material thickness
 - Material properties

Performance and applications

- Main drawbacks are:
 - Burst in a non-predictable geometry
 - Fragment
- Generally used for small diameter, low cost and mass applications (e.g. airbags)

B) Composite discs

- They are made of at least two layers:
 - One metal layer with calibration slits (or through cuts)
 - One continuous layer that ensures gas tightness, normally a film of PTFE or other suitable polymer




Performance and applications

- Burst tolerance and operating ratio are generally better than in solid discs
- The calibrated part of the disc will not fragment; the membrane will fragment (but if it is a thin PTFE film, fragmentation is going to have little or no impact)



Performance and applications

- The composite disc design allows the manufacturing of RD with low and very low burst pressure
- DonadonSDD has manufactured discs bursting at 5 millibar
- This disc model is especially suited for protection of tanks both in pressure and in vacuum and for biogas digesters

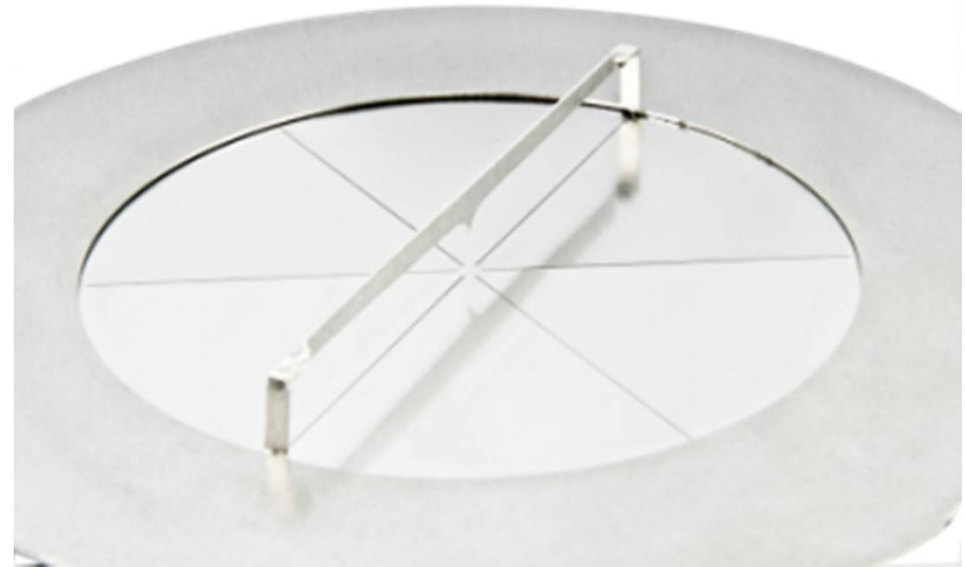

C) Scored forward acting (tension loaded)

- These discs are made with a single metal layer and are flat or domed in the direction of the bursting pressure.



Calibration

- Calibration is obtained by scoring (non-through cuts)
- Rupture pressure depends from design and depth of the scores

Performance and applications

- Scored discs have lower tolerance than solid and composite discs and better operative ratio
- They do not fragment
- Frequently used in the process and chemical industry



D) Reverse acting discs (compression loaded)

- Scored reverse acting discs are made with a single layer of metal domed against the direction of the bursting pressure
- When the pressure differential between upstream and downstream is above the resistance to compression of the dome, this will reverse.
- The disc is scored and after reversal will tear along the scores

Calibration

- Calibration is obtained by controlling the height of the dome
- Defects may be introduced in the dome in order to lower its resistance and to improve the reversal process

Score design 1

- There are two main designs:
 - The common design is with the score along the circumference (perimeter)
 - The disc will open with one petal retained by a non-scored sector and, eventually, by a dampener



Score design 2

- Also cross scored design is possible.
- Rupture discs with this design have good resistance to fragmentation and large discharge area



Performance and applications

- The reverse / compression loaded design allows very tight tolerance and very good operating ratio
- Resistance to repeated pressure cycles is also extremely good.
- They do not fragment
- They are adequate for gas and liquids, however full liquid applications require special care because of possible pressure drop during the reversal / opening phase
- Standard model in oil and gas, chemical and petrochemical and other process industry applications

Manufacturing technology

- The scores are generally made by stamping the disc with a die in a press
- This technology is able to produce high quality rupture discs but requires high capital costs and careful tool maintenance

Laser scoring technology

- DonadonSDD has developed and implemented during the last 10 years an innovative technology based on laser scoring
- This technology may be used for manufacturing both reverse and forward acting scored discs
- It is very flexible both in score design and in manufacturing planning

Score design

- Laser scoring allows to control and optimize
 - score line design,
 - score depth and
 - score profile
- We can score without defects even very thin (20 micron) metal sheets

Cross scored discs with 6 petals

- DonadonSDD has introduced commercially the cross scored discs with 6 or more petals (standard model has 4 petals)
- Key advantages of these models are:
 - Large opening area
 - Resistance to fragmentation even at high burst pressure



Performance and applications

- The DonadonSDD SCR model (reverse cross scored with 6 petals) has a discharge area superior to that calculated for the inscribed hexagon and a certified flow resistance coefficient (K_{Rg}) of 0,48.
- This means that head loss through the RD is less than that caused by a pipe length of half diameter)



Laser scoring

- No mechanical tool that may wear with time is required
- Production planning is very flexible because set-up is fast and inexpensive and therefore small lots of rupture discs are economically viable, fast deliveries are possible and rush orders can be handled

Patent coverage

- Donadon SDD has filed many patent applications (some already granted) covering different aspects of the laser scoring process

Additional information

- Additional information is available from



- Internet site : www.donadonsdd.com
- Or direct enquiry

Thank you for your attention

Questions ?